

POLYESTER WEBBING SLINGS

Polyester webbing slings are manufactured using high-quality synthetic fibers to lift loads that cannot endure trauma caused by displacement. They are designed and constructed to be lightweight, easy to handle, and extremely flexible, suitable for lifting bundles of pipes, drawn bars, profiles and round metal. They do not damage the surfaces of the loads and provide some elasticity to better absorb shocks during handling. The slings maintain their characteristics in temperatures ranging from -40°C to +100°C. For each purchased lifting sling, you will receive a CE Declaration of Conformity provided by us, along with the user instruction manual. Upon request, we can also customize them by printing your logo on one side of the webbing sling. The slings are designed and manufactured in compliance with the following regulations:

- Machinery Directive 2006/42/EC
- UNI EN ISO 12100:2010
- UNI EN 1492-1

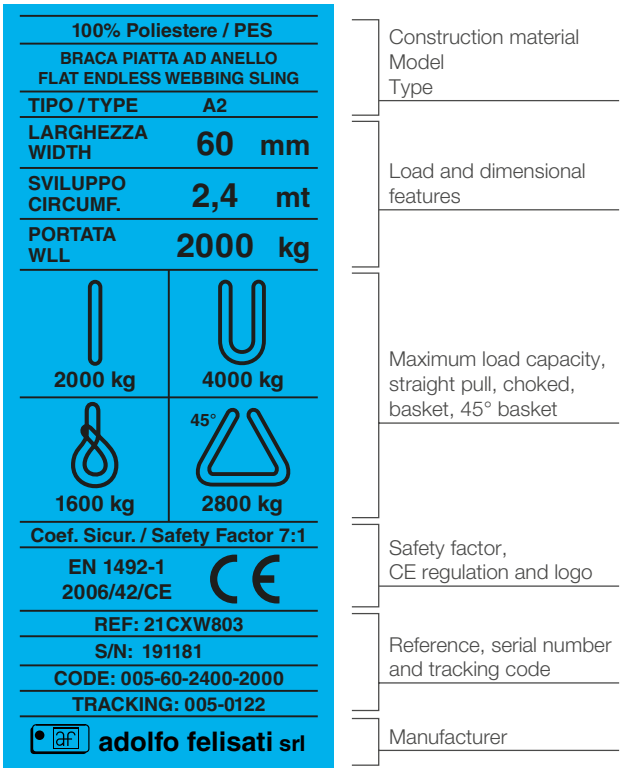

Label specifications according to the Machinery Directive 2006/42/CE

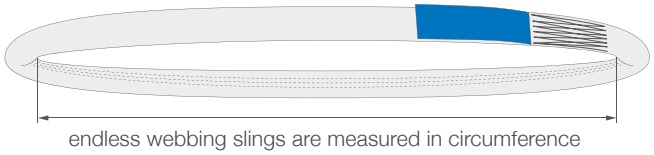

endless webbing slings are measured in circumference




eye to eye webbing slings are measured in useful length

		STRAIGHT	BASKET	CHOKED	BASKET 45°
COLOUR	LOAD	Maximum load Kg according to the type of lifting			
PURPLE	1000 Kg	1000	2000	800	1400
GREEN	2000 Kg	2000	4000	1600	2800
YELLOW	3000 Kg	3000	6000	2400	4200
GREY	4000 Kg	4000	8000	3200	5600
RED	5000 Kg	5000	10000	4000	7000
BROWN	6000 Kg	6000	12000	4800	8400
BLUE	8000 Kg	8000	16000	6400	11200
ORANGE	10000 Kg	10000	20000	8000	14000

Coloring and load capacity in compliance with the EN1492-1 Standard





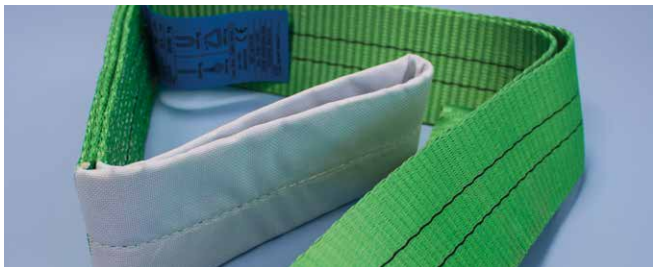

adolfo felisati srl
www.felisati.it
Via 1° Maggio, 55 - 20863 Concorezzo (MB) - ITALY - Tel. (+39) 039 6043346 - Fax (+39) 039 6049184
Partita IVA: IT00806200960 - Codice Fiscale: 05816190150 - Codice SDI: T04ZHR3 - email: info@felisati.it - 0015-rev.1