

STEEL WIRE ROPE RING SLINGS


These lifting accessories are multi-purpose, without fixed attachment points and consist of a flexible braided steel rope with a metal core. Steel wire rope ring slings are a perfect solution for handling packages of sharp-edged steel products (beams, angles, squares) with maximum safety. They can be made with a single or double braided ring to lift the materials also in strangle mode. Galvanised or stainless steel ropes conform to ISO 2408. On request, we can also make slings with a robust PVC sheath to increase resistance to shear hazards and to protect the load surface. For every lifting sling you purchase, you will receive a CE Declaration of Conformity from us, together with an instruction manual.

The slings are designed and manufactured with reference to the following documents:

- Machinery Directive 2006/42/EC
- UNI EN ISO 12100:2010
- UNI EN 13414-1:2009
- UNI EN 13414-2:2009
- ISO 2408

TECHNICAL FEATURES

Single or double braided ring slings, manufactured with a 5:1 safety factor, customisable in terms of rope type and diameter, load capacity, length and finish (polished or galvanised).

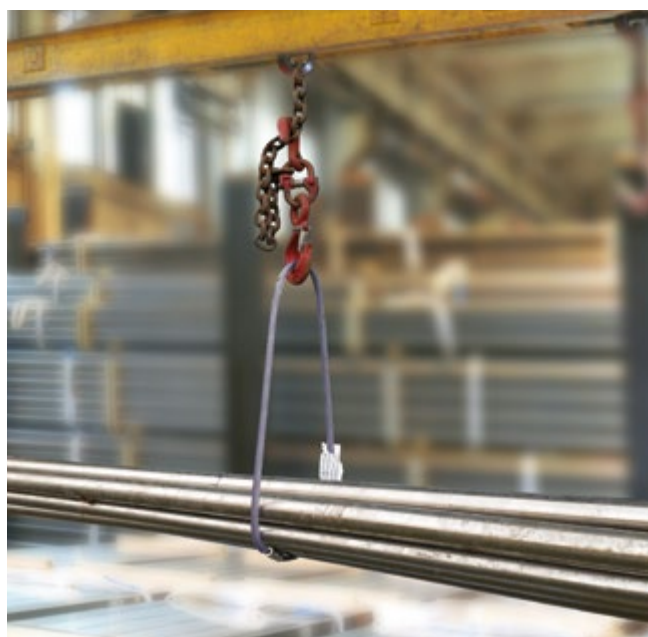

adolfo felisati & C. s.n.c.

www.felisati.it

Via 1° Maggio, 55 | 20863 Concorezzo (MB) | ITALY | Tel. (+39) 039 6043346 | Fax (+39) 039 6049184 | info@felisati.it
P.IVA 00806200960 | C.F. 05816190150 | C.C.I.A.A. Monza e Brianza n. 1038747 | Iscr. Trib. di Monza Reg. Soc. n. 17555 | 0016-rev.2